


POLYVINYL CHLORIDE COATED (PVC) GALVANIZED SPIRAL PIPE—VP01, VP02

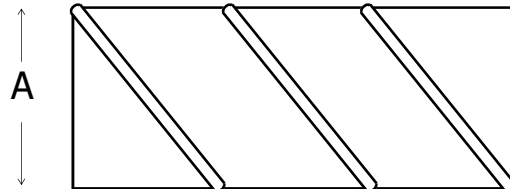

DIAMETER (A)	GAUGES
4	26
5	26
6	26, 24
7	26, 24
8	26, 24
9	26, 24
10	26, 24
12	26, 24
14	26, 24
16	26, 24

DIAMETER (A)	GAUGES
18	24, 22
20	24, 22
22	24, 22
24	24, 22
26	24, 22
28	24, 22
30	24, 22
32	22
34	22
36	22

Part Number Designations

VP01xxyy: Ordering in FEET ex: (100) VP010626 = 100' or 10 jts/10' 6" 26GA Spiral

VP02xxyyzz: Ordering specific lengths ex: (20) VP02062605 = 20 jts/5', 6" 26GA Spiral

Where: **xx** = DIAMETER (04-36)

yy = GAUGE (26, 24, 22)

zz = LENGTH IN FEET (01-20). Cut charges apply for non-standard 10'

Options: RAISED or SMOOTH seam. Smooth Standard for 4"-14" but avail up to 24"

Raised bead standard for 16" - 36" and avail from 10" - 14"

RATED +10" WG, -2" WG

Properties: Galvanized steel coated with polyvinyl chloride. Corrosion and weather resistant.

4-Ply spiral lock seam. 4 mil coating outside, 1 mil coating inside

PROJECT: _____	COMPANY: _____	DATE : _____
LOCATION: _____	SUBMITTED BY: _____	